

ANTIVIBRANTI



VIBRATION-DAMPING


# SUPPORTI ANTIVIBRANTI

## Vibration-Damping



### Tipo Cilindrici Cylindrical Type

MM

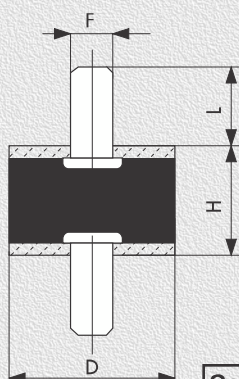


Carico max Kg

| COD.  | D   | H  | F   | L  | COM. | TAG. |
|-------|-----|----|-----|----|------|------|
| 1015  | 10  | 15 | M5  | 14 | 15   | 2    |
| 1515  | 15  | 15 | M4  | 14 | 20   | 4    |
| 1515  | 15  | 15 | M5  | 14 | 20   | 4    |
| 1520  | 15  | 20 | M5  | 14 | 20   | 4    |
| 2010  | 20  | 10 | M6  | 16 | 45   | 4    |
| 2015  | 20  | 15 | M6  | 16 | 50   | 4    |
| 2020  | 20  | 20 | M6  | 16 | 40   | 3    |
| 2025  | 20  | 25 | M5  | 16 | 30   | 3    |
| 2030  | 20  | 30 | M6  | 16 | 30   | 3    |
| 2515  | 25  | 15 | M6  | 18 | 50   | 6    |
| 2520  | 25  | 20 | M6  | 18 | 60   | 6    |
| 2520  | 25  | 20 | M8  | 18 | 60   | 6    |
| 2525  | 25  | 25 | M6  | 18 | 40   | 4    |
| 2530  | 25  | 30 | M6  | 18 | 40   | 4    |
| 2535  | 25  | 35 | M6  | 18 | 45   | 4    |
| 3015  | 30  | 15 | M8  | 23 | 60   | 6    |
| 3020  | 30  | 20 | M8  | 23 | 80   | 8    |
| 3025  | 30  | 25 | M8  | 23 | 80   | 8    |
| 3030  | 30  | 30 | M6  | 23 | 80   | 8    |
| 3030  | 30  | 30 | M8  | 23 | 80   | 8    |
| 3040  | 30  | 40 | M8  | 23 | 65   | 7    |
| 4015  | 40  | 15 | M8  | 23 | 90   | 13   |
| 4020  | 40  | 20 | M8  | 23 | 100  | 14   |
| 4030  | 40  | 30 | M8  | 23 | 120  | 16   |
| 4030  | 40  | 30 | M10 | 28 | 120  | 16   |
| 4035  | 40  | 35 | M8  | 23 | 130  | 17   |
| 4040  | 40  | 40 | M8  | 23 | 140  | 18   |
| 5020  | 50  | 20 | M10 | 28 | 150  | 20   |
| 5030  | 50  | 30 | M10 | 28 | 160  | 20   |
| 5035  | 50  | 35 | M10 | 28 | 170  | 18   |
| 5040  | 50  | 40 | M10 | 28 | 170  | 18   |
| 5045  | 50  | 45 | M10 | 28 | 155  | 17   |
| 5050  | 50  | 50 | M10 | 28 | 150  | 14   |
| 6030  | 60  | 30 | M12 | 32 | 240  | 40   |
| 6035  | 60  | 35 | M12 | 32 | 250  | 35   |
| 6040  | 60  | 40 | M12 | 32 | 240  | 35   |
| 6045  | 60  | 45 | M12 | 32 | 240  | 30   |
| 6050  | 60  | 50 | M12 | 32 | 230  | 25   |
| 6055  | 60  | 55 | M12 | 32 | 200  | 25   |
| 6060  | 60  | 60 | M12 | 32 | 200  | 25   |
| 7525  | 75  | 25 | M12 | 47 | 450  | 90   |
| 7530  | 75  | 30 | M12 | 47 | 500  | 80   |
| 7535  | 75  | 35 | M12 | 47 | 490  | 70   |
| 7540  | 75  | 40 | M12 | 47 | 480  | 60   |
| 7550  | 75  | 50 | M12 | 47 | 480  | 60   |
| 7555  | 75  | 55 | M12 | 47 | 460  | 50   |
| 7560  | 75  | 60 | M12 | 47 | 450  | 40   |
| 10040 | 100 | 40 | M16 | 47 | 900  | 100  |
| 10050 | 100 | 50 | M16 | 47 | 850  | 100  |
| 10055 | 100 | 55 | M16 | 47 | 850  | 100  |
| 10060 | 100 | 60 | M16 | 47 | 800  | 90   |

### Tipo Cilindrici Cylindrical Type

MF

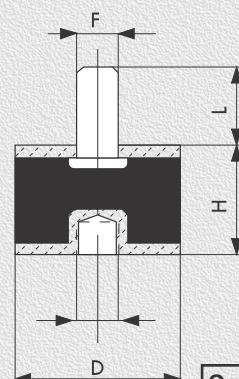

Carico max Kg

| COD.  | D   | H  | F   | L  | COM. | TAG. |
|-------|-----|----|-----|----|------|------|
| 1015  | 10  | 15 | M5  | 14 | 15   | 2    |
| 1515  | 15  | 15 | M4  | 14 | 20   | 4    |
| 1515  | 15  | 15 | M5  | 14 | 20   | 4    |
| 1520  | 15  | 20 | M5  | 14 | 20   | 4    |
| 2010  | 20  | 10 | M6  | 16 | 45   | 4    |
| 2015  | 20  | 15 | M6  | 16 | 50   | 4    |
| 2020  | 20  | 20 | M6  | 16 | 40   | 3    |
| 2025  | 20  | 25 | M5  | 16 | 30   | 3    |
| 2030  | 20  | 30 | M6  | 16 | 30   | 3    |
| 2515  | 25  | 15 | M6  | 18 | 50   | 6    |
| 2520  | 25  | 20 | M6  | 18 | 60   | 6    |
| 2520  | 25  | 20 | M8  | 18 | 60   | 6    |
| 2525  | 25  | 25 | M6  | 18 | 40   | 4    |
| 2530  | 25  | 30 | M6  | 18 | 40   | 4    |
| 2535  | 25  | 35 | M6  | 18 | 45   | 4    |
| 3015  | 30  | 15 | M8  | 23 | 60   | 6    |
| 3020  | 30  | 20 | M8  | 23 | 80   | 8    |
| 3025  | 30  | 25 | M8  | 23 | 80   | 8    |
| 3030  | 30  | 30 | M6  | 23 | 80   | 8    |
| 3030  | 30  | 30 | M8  | 23 | 80   | 8    |
| 3040  | 30  | 40 | M8  | 23 | 65   | 7    |
| 4015  | 40  | 15 | M8  | 23 | 90   | 13   |
| 4020  | 40  | 20 | M8  | 23 | 100  | 14   |
| 4030  | 40  | 30 | M8  | 23 | 120  | 16   |
| 4030  | 40  | 30 | M10 | 28 | 120  | 16   |
| 4035  | 40  | 35 | M8  | 23 | 130  | 17   |
| 4040  | 40  | 40 | M8  | 23 | 140  | 18   |
| 5020  | 50  | 20 | M10 | 28 | 150  | 20   |
| 5030  | 50  | 30 | M10 | 28 | 160  | 20   |
| 5035  | 50  | 35 | M10 | 28 | 170  | 18   |
| 5040  | 50  | 40 | M10 | 28 | 170  | 18   |
| 5045  | 50  | 45 | M10 | 28 | 155  | 17   |
| 5050  | 50  | 50 | M10 | 28 | 150  | 14   |
| 6030  | 60  | 30 | M12 | 32 | 240  | 40   |
| 6035  | 60  | 35 | M12 | 32 | 250  | 35   |
| 6040  | 60  | 40 | M12 | 32 | 240  | 35   |
| 6045  | 60  | 45 | M12 | 32 | 240  | 30   |
| 6050  | 60  | 50 | M12 | 32 | 230  | 25   |
| 6055  | 60  | 55 | M12 | 32 | 200  | 25   |
| 6060  | 60  | 60 | M12 | 32 | 200  | 25   |
| 7525  | 75  | 25 | M12 | 47 | 450  | 90   |
| 7530  | 75  | 30 | M12 | 47 | 500  | 80   |
| 7535  | 75  | 35 | M12 | 47 | 490  | 70   |
| 7540  | 75  | 40 | M12 | 47 | 480  | 60   |
| 7550  | 75  | 50 | M12 | 47 | 480  | 60   |
| 7555  | 75  | 55 | M12 | 47 | 460  | 50   |
| 7560  | 75  | 60 | M12 | 47 | 450  | 40   |
| 10040 | 100 | 40 | M16 | 47 | 900  | 100  |
| 10050 | 100 | 50 | M16 | 47 | 850  | 100  |
| 10055 | 100 | 55 | M16 | 47 | 850  | 100  |
| 10060 | 100 | 60 | M16 | 47 | 800  | 90   |


# SUPPORTI ANTIVIBRANTI

## Vibration-Damping



### Tipo Cilindrici Cylindrical Type

FF




Carico max Kg

| COD.  | D   | H  | F   | COM. | TAG. |
|-------|-----|----|-----|------|------|
| 1015  | 10  | 15 | M5  | 15   | 2    |
| 1515  | 15  | 15 | M4  | 20   | 4    |
| 1515  | 15  | 15 | M5  | 20   | 4    |
| 1520  | 15  | 20 | M5  | 20   | 4    |
| 2010  | 20  | 10 | M6  | 45   | 4    |
| 2015  | 20  | 15 | M6  | 50   | 4    |
| 2020  | 20  | 20 | M6  | 40   | 3    |
| 2025  | 20  | 25 | M5  | 30   | 3    |
| 2030  | 20  | 30 | M6  | 30   | 3    |
| 2515  | 25  | 15 | M6  | 50   | 6    |
| 2520  | 25  | 20 | M6  | 60   | 6    |
| 2520  | 25  | 20 | M8  | 60   | 6    |
| 2525  | 25  | 25 | M6  | 40   | 4    |
| 2530  | 25  | 30 | M6  | 40   | 4    |
| 2535  | 25  | 35 | M6  | 45   | 4    |
| 3015  | 30  | 15 | M8  | 60   | 6    |
| 3020  | 30  | 20 | M8  | 80   | 8    |
| 3025  | 30  | 25 | M8  | 80   | 8    |
| 3030  | 30  | 30 | M6  | 80   | 8    |
| 3030  | 30  | 30 | M8  | 80   | 8    |
| 3040  | 30  | 40 | M8  | 65   | 7    |
| 4015  | 40  | 15 | M8  | 90   | 13   |
| 4020  | 40  | 20 | M8  | 100  | 14   |
| 4030  | 40  | 30 | M8  | 120  | 16   |
| 4030  | 40  | 30 | M10 | 120  | 16   |
| 4035  | 40  | 35 | M8  | 130  | 17   |
| 4040  | 40  | 40 | M8  | 140  | 18   |
| 5020  | 50  | 20 | M10 | 150  | 20   |
| 5030  | 50  | 30 | M10 | 160  | 20   |
| 5035  | 50  | 35 | M10 | 170  | 18   |
| 5040  | 50  | 40 | M10 | 170  | 18   |
| 5045  | 50  | 45 | M10 | 155  | 17   |
| 5050  | 50  | 50 | M10 | 150  | 14   |
| 6030  | 60  | 30 | M12 | 240  | 40   |
| 6035  | 60  | 35 | M12 | 250  | 35   |
| 6040  | 60  | 40 | M12 | 240  | 35   |
| 6045  | 60  | 45 | M12 | 240  | 30   |
| 6050  | 60  | 50 | M12 | 230  | 25   |
| 6055  | 60  | 55 | M12 | 200  | 25   |
| 6060  | 60  | 60 | M12 | 200  | 25   |
| 7525  | 75  | 25 | M12 | 450  | 90   |
| 7530  | 75  | 30 | M12 | 500  | 80   |
| 7535  | 75  | 35 | M12 | 490  | 70   |
| 7540  | 75  | 40 | M12 | 480  | 60   |
| 7550  | 75  | 50 | M12 | 480  | 60   |
| 7555  | 75  | 55 | M12 | 460  | 50   |
| 7560  | 75  | 60 | M12 | 450  | 40   |
| 10040 | 100 | 40 | M16 | 900  | 100  |
| 10050 | 100 | 50 | M16 | 850  | 100  |
| 10055 | 100 | 55 | M16 | 850  | 100  |
| 10060 | 100 | 60 | M16 | 800  | 90   |

### Piedini Cilindrici Foot-Shaped Cylindrical

PM




Carico max Kg

| COD.  | D   | H  | F   | L  | COM. | TAG. |
|-------|-----|----|-----|----|------|------|
| 1015  | 10  | 15 | M5  | 14 | 15   | 2    |
| 1515  | 15  | 15 | M4  | 14 | 20   | 4    |
| 1515  | 15  | 15 | M5  | 14 | 20   | 4    |
| 1520  | 15  | 20 | M5  | 14 | 20   | 4    |
| 2010  | 20  | 10 | M6  | 16 | 45   | 4    |
| 2015  | 20  | 15 | M6  | 16 | 50   | 4    |
| 2020  | 20  | 20 | M6  | 16 | 40   | 3    |
| 2025  | 20  | 25 | M5  | 16 | 30   | 3    |
| 2030  | 20  | 30 | M6  | 16 | 30   | 3    |
| 2515  | 25  | 15 | M6  | 18 | 50   | 6    |
| 2520  | 25  | 20 | M6  | 18 | 60   | 6    |
| 2520  | 25  | 20 | M8  | 18 | 60   | 6    |
| 2525  | 25  | 25 | M6  | 18 | 40   | 4    |
| 2530  | 25  | 30 | M6  | 18 | 40   | 4    |
| 2535  | 25  | 35 | M6  | 18 | 45   | 4    |
| 3015  | 30  | 15 | M8  | 23 | 60   | 6    |
| 3020  | 30  | 20 | M8  | 23 | 80   | 8    |
| 3025  | 30  | 25 | M8  | 23 | 80   | 8    |
| 3030  | 30  | 30 | M6  | 23 | 80   | 8    |
| 3030  | 30  | 30 | M8  | 23 | 80   | 8    |
| 3040  | 30  | 40 | M8  | 23 | 65   | 7    |
| 4015  | 40  | 15 | M8  | 23 | 90   | 13   |
| 4020  | 40  | 20 | M8  | 23 | 100  | 14   |
| 4030  | 40  | 30 | M8  | 23 | 120  | 16   |
| 4030  | 40  | 30 | M10 | 28 | 120  | 16   |
| 4035  | 40  | 35 | M8  | 23 | 130  | 17   |
| 4040  | 40  | 40 | M8  | 23 | 140  | 18   |
| 5020  | 50  | 20 | M10 | 28 | 150  | 20   |
| 5030  | 50  | 30 | M10 | 28 | 160  | 20   |
| 5035  | 50  | 35 | M10 | 28 | 170  | 18   |
| 5040  | 50  | 40 | M10 | 28 | 170  | 18   |
| 5045  | 50  | 45 | M10 | 28 | 155  | 17   |
| 5050  | 50  | 50 | M10 | 28 | 150  | 14   |
| 6030  | 60  | 30 | M12 | 32 | 240  | 40   |
| 6035  | 60  | 35 | M12 | 32 | 250  | 35   |
| 6040  | 60  | 40 | M12 | 32 | 240  | 35   |
| 6045  | 60  | 45 | M12 | 32 | 240  | 30   |
| 6050  | 60  | 50 | M12 | 32 | 230  | 25   |
| 6055  | 60  | 55 | M12 | 32 | 200  | 25   |
| 6060  | 60  | 60 | M12 | 32 | 200  | 25   |
| 7525  | 75  | 25 | M12 | 47 | 450  | 90   |
| 7530  | 75  | 30 | M12 | 47 | 500  | 80   |
| 7535  | 75  | 35 | M12 | 47 | 490  | 70   |
| 7540  | 75  | 40 | M12 | 47 | 480  | 60   |
| 7550  | 75  | 50 | M12 | 47 | 480  | 60   |
| 7555  | 75  | 55 | M12 | 47 | 460  | 50   |
| 7560  | 75  | 60 | M12 | 47 | 450  | 40   |
| 10040 | 100 | 40 | M16 | 47 | 900  | 100  |
| 10050 | 100 | 50 | M16 | 47 | 850  | 100  |
| 10055 | 100 | 55 | M16 | 47 | 850  | 100  |
| 10060 | 100 | 60 | M16 | 47 | 800  | 90   |

### Piedini Cilindrici Foot-Shaped Cylindrical


PF



| Carico max Kg |     |    |     |      |      |
|---------------|-----|----|-----|------|------|
| COD.          | D   | H  | F   | COM. | TAG. |
| 1015          | 10  | 15 | M5  | 15   | 2    |
| 1515          | 15  | 15 | M4  | 20   | 4    |
| 1515          | 15  | 15 | M5  | 20   | 4    |
| 1520          | 15  | 20 | M5  | 20   | 4    |
| 2010          | 20  | 10 | M6  | 45   | 4    |
| 2015          | 20  | 15 | M6  | 50   | 4    |
| 2020          | 20  | 20 | M6  | 40   | 3    |
| 2025          | 20  | 25 | M5  | 30   | 3    |
| 2030          | 20  | 30 | M6  | 30   | 3    |
| 2515          | 25  | 15 | M6  | 50   | 6    |
| 2520          | 25  | 20 | M6  | 60   | 6    |
| 2520          | 25  | 20 | M8  | 60   | 6    |
| 2525          | 25  | 25 | M6  | 40   | 4    |
| 2530          | 25  | 30 | M6  | 40   | 4    |
| 2535          | 25  | 35 | M6  | 45   | 4    |
| 3015          | 30  | 15 | M8  | 60   | 6    |
| 3020          | 30  | 20 | M8  | 80   | 8    |
| 3025          | 30  | 25 | M8  | 80   | 8    |
| 3030          | 30  | 30 | M6  | 80   | 8    |
| 3030          | 30  | 30 | M8  | 80   | 8    |
| 3040          | 30  | 40 | M8  | 65   | 7    |
| 4015          | 40  | 15 | M8  | 90   | 13   |
| 4020          | 40  | 20 | M8  | 100  | 14   |
| 4030          | 40  | 30 | M8  | 120  | 16   |
| 4030          | 40  | 30 | M10 | 120  | 16   |
| 4035          | 40  | 35 | M8  | 130  | 17   |
| 4040          | 40  | 40 | M8  | 140  | 18   |
| 5020          | 50  | 20 | M10 | 150  | 20   |
| 5030          | 50  | 30 | M10 | 160  | 20   |
| 5035          | 50  | 35 | M10 | 170  | 18   |
| 5040          | 50  | 40 | M10 | 170  | 18   |
| 5045          | 50  | 45 | M10 | 155  | 17   |
| 5050          | 50  | 50 | M10 | 150  | 14   |
| 6030          | 60  | 30 | M12 | 240  | 40   |
| 6035          | 60  | 35 | M12 | 250  | 35   |
| 6040          | 60  | 40 | M12 | 240  | 35   |
| 6045          | 60  | 45 | M12 | 240  | 30   |
| 6050          | 60  | 50 | M12 | 230  | 25   |
| 6055          | 60  | 55 | M12 | 200  | 25   |
| 6060          | 60  | 60 | M12 | 200  | 25   |
| 7525          | 75  | 25 | M12 | 450  | 90   |
| 7530          | 75  | 30 | M12 | 500  | 80   |
| 7535          | 75  | 35 | M12 | 490  | 70   |
| 7540          | 75  | 40 | M12 | 480  | 60   |
| 7550          | 75  | 50 | M12 | 480  | 60   |
| 7555          | 75  | 55 | M12 | 460  | 50   |
| 7560          | 75  | 60 | M12 | 450  | 40   |
| 10040         | 100 | 40 | M16 | 900  | 100  |
| 10050         | 100 | 50 | M16 | 850  | 100  |
| 10055         | 100 | 55 | M16 | 850  | 100  |
| 10060         | 100 | 60 | M16 | 800  | 90   |

### Cilindrici Sgolati Concave Cylindrical


MM

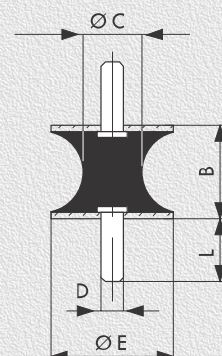

| Carico max Kg |    |    |    |    |    |      |      |
|---------------|----|----|----|----|----|------|------|
| COD.          | E  | B  | C  | D  | L  | COM. | TAG. |
| 252010        | 25 | 20 | 10 | M6 | 14 | 10   | 3    |
| 403019        | 40 | 30 | 19 | M8 | 18 | 15   | 5    |
| 403027        | 40 | 30 | 27 | M8 | 18 | 30   | 10   |

### Cilindrici Sgolati Concave Cylindrical


MF

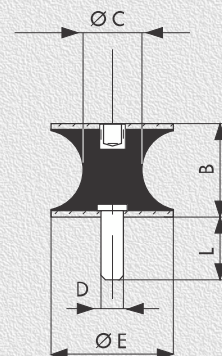

| Carico max Kg |    |    |    |    |    |      |      |
|---------------|----|----|----|----|----|------|------|
| COD.          | E  | B  | C  | D  | L  | COM. | TAG. |
| 252010        | 25 | 20 | 10 | M6 | 14 | 10   | 3    |
| 403019        | 40 | 30 | 19 | M8 | 18 | 15   | 5    |
| 403027        | 40 | 30 | 27 | M8 | 18 | 30   | 10   |


### Cilindrici Sgolati Concave Cylindrical

FF

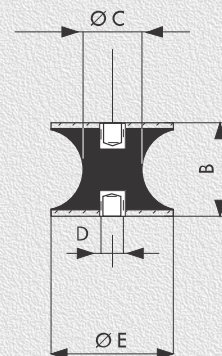


| Carico max Kg |    |    |    |    |      |      |  |
|---------------|----|----|----|----|------|------|--|
| COD.          | E  | B  | C  | D  | COM. | TAG. |  |
| 255010        | 25 | 20 | 10 | M6 | 10   | 3    |  |
| 403019        | 40 | 30 | 19 | M8 | 15   | 5    |  |
| 403027        | 40 | 30 | 27 | M8 | 30   | 10   |  |

### Tipo a Campana Bell-Shaped Type

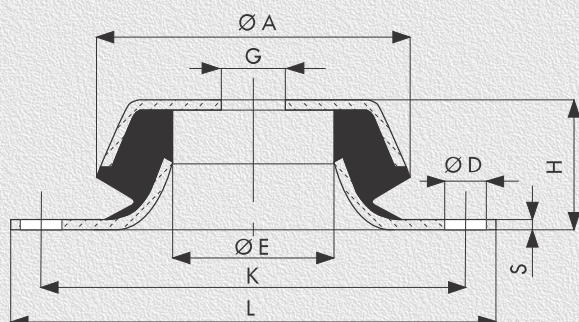

| COD. | A<br>mm | D<br>mm | E<br>mm | G<br>mm | H<br>mm | K<br>mm | L<br>mm | S<br>mm | *<br>Kg |
|------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| C62  | 62      | 10.2    | 25      | 12.5    | 30      | 85      | 100     | 2       | 200     |
| C90  | 90      | 10.2    | 42      | 17      | 45      | 108     | 134     | 3       | 350     |
| C115 | 115     | 16.2    | 60      | 24      | 45      | 150     | 190     | 4       | 600     |

\* CARICO MAX

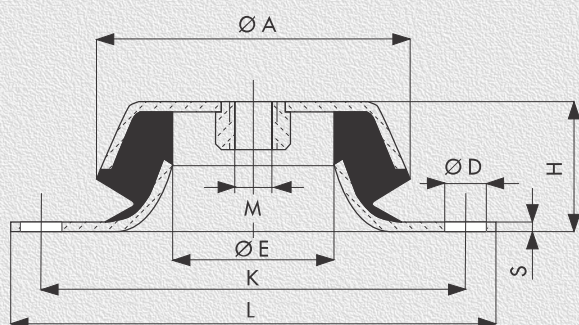


| COD.  | A<br>mm | D<br>mm | E<br>mm | H<br>mm | K<br>mm | L<br>mm | S<br>mm | M<br>mm | *<br>Kg |
|-------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| C62D  | 62      | 10.2    | 25      | 30      | 85      | 100     | 2       | M10     | 200     |
| C90D  | 90      | 10.2    | 42      | 45      | 108     | 134     | 3       | M16     | 350     |
| C115D | 115     | 16.2    | 60      | 45      | 150     | 190     | 4       | M24     | 600     |

\* CARICO MAX

### Piedini a parabola Parabola-Shaped foot


PM



| COD. | D<br>mm | H<br>mm | F<br>mm | L<br>mm | *<br>Kg |
|------|---------|---------|---------|---------|---------|
| 2530 | 25      | 30      | 6       | 18      | 20      |
| 3040 | 30      | 40      | 8       | 23      | 25      |
| 4035 | 40      | 35      | 8       | 25      | 35      |
| 5050 | 50      | 50      | 10      | 28      | 60      |
| 5065 | 50      | 65      | 8       | 35      | 55      |
| 6060 | 60      | 60      | 12      | 32      | 75      |
| 9585 | 95      | 85      | 16      | 47      | 250     |

\* CARICO MAX


### Elastici a Flangia • Elastic at Flange

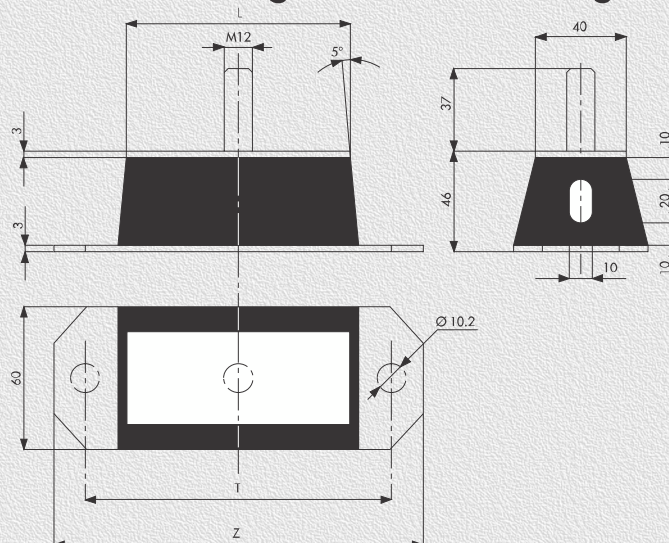

| COD. | Z<br>mm | L<br>mm | T<br>mm | Max. carico a comp.ne<br>Max pressure load<br>Kg |
|------|---------|---------|---------|--------------------------------------------------|
| F115 | 115     | 50      | 85      | 500                                              |
| F165 | 165     | 100     | 135     | 1200                                             |
| F215 | 215     | 150     | 185     | 1400                                             |
| F265 | 265     | 200     | 235     | 1600                                             |

### Supporto a Flangia Damping at Flange

| COD.    | F<br>mm | DxB<br>mm | Durezza<br>Hardness<br>Shore | Max. carico a comp.ne<br>Max pressure load<br>Kg |
|---------|---------|-----------|------------------------------|--------------------------------------------------|
| G807045 | 105     | 80x70     | 45                           | 650                                              |
| G807060 | 105     | 80x70     | 60                           | 950                                              |

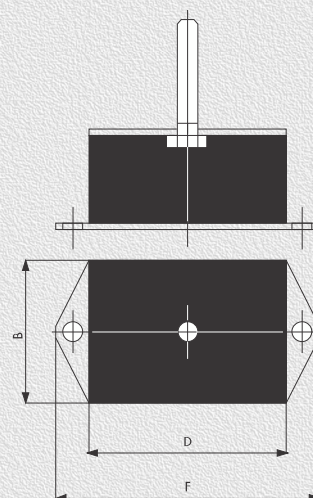

### CARATTERISTICHE TECNICHE/TECHNICAL CHARACTERISTICS

|                                         |                            |
|-----------------------------------------|----------------------------|
| GOMMA<br>RUBBER                         | NR                         |
| DUREZZA STANDARD<br>STANDARD HARDNESS   | 60 Sh.                     |
| DUREZZA A RICHIESTA<br>REQUEST HARDNESS | 40 - 45 - 50 - 65 - 70 Sh. |